

CARBON CARTRIDGE (WCSIFB)

STANDARD DIAMETER

FEATURES AND BENEFITS

- Excellent for Bacteria removal
- Radial Flow Design
- One piece Molded Carbon Block
- Excellent Filtering Performance
- Individually Wrapped and Sealed

TYPICAL APPLICATIONS

- Domestic
- Rural
- Potable water
- Commercial

Whilst a standard carbon block effectively removes chlorine, taste and odour issues from water, this Silver impregnated cartridge is designed to also remove bacteria. Activated carbon is made from coconut shell and activated through extreme high temperature and pressure stream. This carbon is then impregnated with silver and is well known for its bacteriostatic agent to inhibit the growth of bacteria within the carbon media.

This Silver Impregnated filter cartridge is used globally in the aid for bacteriostatic water filter products for home use, potable water and beverage water. The filter fits most standard 10" housings.




GENERAL SPECIFICATIONS

Micron Ratings (Nominal)	1 micron
Available Lengths	250 mm (9 ⁷ / ₈ ")
Outside Diameter	71mm (2 ⁷ / ₈ ")
Inside Diameter	28 mm (1 ¹ / ₈ ")
Temperature Ranges	4.4°C - 52°C (40°F - 125°F)
Filter Capacity	(Per 250 mm length) @ 3.8 LPM 7,560 Litres (Estimated capacity based on 2.0 mg/l free available chlorine, capacity will vary depending on raw water quality)

NOTE:

Recommended cartridge change is 6-9 months from date of installation or earlier if required, or at a maximum increase pressure differential of 69kPa (10psi), whichever occurs first.

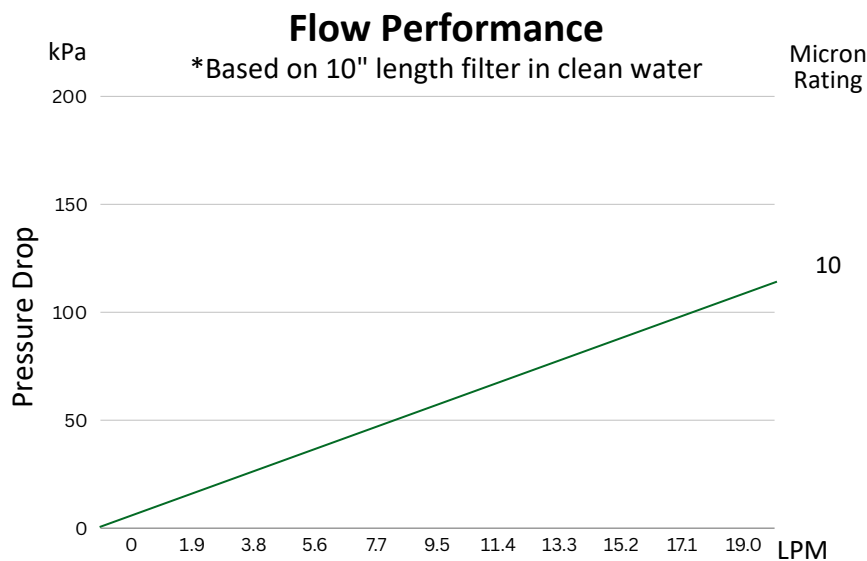

Warning:

For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection.

MODEL NUMBER

	10"
1 micron	WCSIFB10S