SEDIMENT PLEATED WASHABLE CARTRIDGE

Large Diameter

Features and Benefits

- Price Competitive
- Higher Flow with Lower Pressure Loss
- Exceptional Dirt Hold Capacity
- Reusable Cartridge, which translates into Money Saved
- Excellent Filtering Performance
- Individually Wrapped and Sealed

Typical Applications

- Domestic
- Rural
- Commercial
- Light Industrial

The Pleated Filter Cartridge is designed to supply a high flow rate with minimal pressure loss while maintaining a high quality of filtration. This is achieved by using a high quality, reusable, polyester, pleated fabric over a polypropylene support core.

The Pleated Filter Cartridge design has been designed for exceptional sediment loading capacity with the ability to be rinsed and reused in most applications thus extending the usable life of the cartridge. They are well suited for sediment removal in low pressure applications and in general Domestic, Rural, Commercial and Light Industrial uses

---

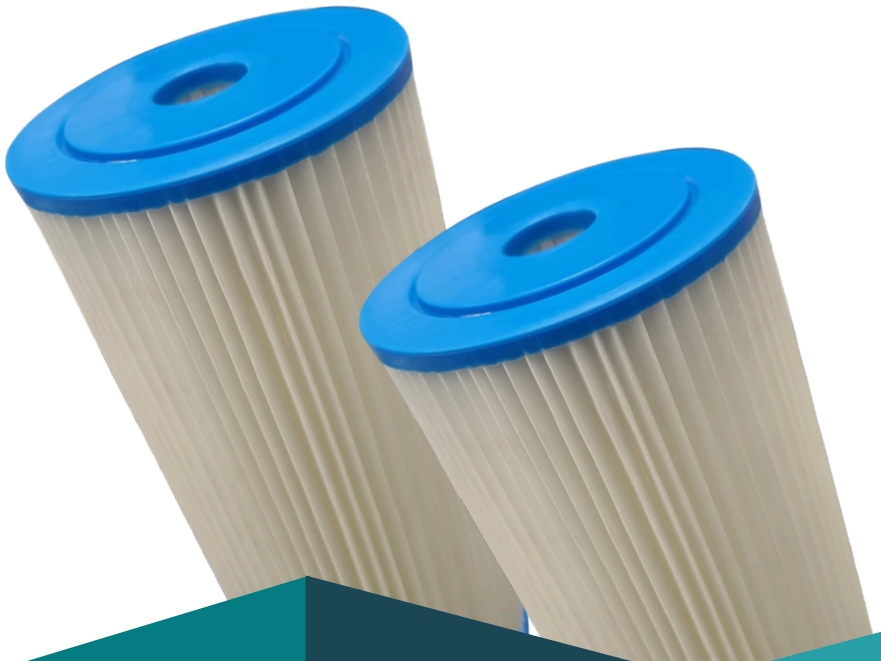

General Specifications

Micron Ratings (Nominal)	0.35 micron	1 micron	5 micron	10 micron	20 micron	50 micron
Available Lengths	250 mm (9⅞") 508mm (20")	250 mm (9⅞") 508mm (20")	250 mm (9⅞") 508mm (20")	250 mm (9⅞") 508mm (20")	250 mm (9⅞") 508mm (20")	508mm (20")
Outside Diameter	114mm (4½")	114mm (4½")	114mm (4½")	114mm (4½")	114mm (4½")	114mm (4½")
Inside Diameter	28mm (1⅛")	28 mm (1⅛")	28 mm (1⅛")	28mm (1⅛")	28mm (1⅛")	28mm (1⅛")
Filter Area Approximately	250mm: 1.02m2 (11 ft2) 508mm: 2.14m2 (23 ft2)	250mm: 1.02m2 (11 ft2) 508mm: 2.14m2 (23 ft2)	250mm: 1.02m2 (11 ft2) 508mm: 2.14m2 (23 ft2)	250mm: 1.02m2 (11 ft2) 508mm: 2.14m2 (23 ft2)	250mm: 1.02m2 (11 ft2) 508mm: 2.14m2 (23 ft2)	508mm: 2.14m2 (23 ft2)
Temperature Ranges	4.4°C - 52°C (40°F - 125°F)	4.4°C - 52°C (40°F - 125°F)	4.4°C - 52°C (40°F - 125°F)	4.4°C - 52°C (40°F - 125°F)	4.4°C - 52°C (40°F - 125°F)	4.4°C - 52°C (40°F - 125°F)

Part Numbers

	10"	20"
0.35 micron	WCSP10L0.35	WCSP20L0.35
1 micron	WCSPF10L01	WCSPF20L01
5 micron	WCSPF10L05	WCSPF20L05
10 micron	WCSPF10L10	WCSPF20L10
20 micron	WCSPF10L20	WCSPF20L20
50 micron	-	WCSPF20L50

⚠️ **IMPORTANT NOTES:**

1. Recommended cartridge change is 6-9 months from date of installation, or earlier if required or at a maximum increased pressure differential of 69 kPa (10psi), whichever occurs first.
2. For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection.

WATERMART RESERVES THE RIGHT TO CHANGE ANY DESIGN, SPECIFICATION AND PERFORMANCE FIGURES WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION FROM SUCH CHANGES