

PRF-RO REVERSE OSMOSIS SYSTEM

COMPACT, RELIABLE SYSTEM WITH CAPACITY FOR MANY SMALL BUSINESS APPLICATIONS



Pentair® offers an innovation that gives customers an abundant supply of RO water, without the need for electric pumps or bulky storage tanks.

The Pentair Reverse Osmosis System delivers up to 690 gallons per day using typical line pressure, which eliminates the need for a supplemental pump in most applications. That's enough capacity for many small business applications, at the price of a residential system. The Pentair RO features a continuous flow design, so there's no need to clear space for a storage tank.

FEATURES/BENEFITS

Continuous Flow – No storage tank needed.

Works with Line Pressure – >40 psi / 2.76 bar

No Pump or Electricity

Quick latch snaps into place and locks down all four tubing connections in one easy step

Never Runs Dry – On-demand flow system will create hundreds of gallons per day.

Consistent Membrane Efficiency

High Recovery System – Less wasted water goes down the drain.

Tough Stuff – Constructed of high impact plastic for years of dependability.

Virtually Maintenance Free – Change cartridges fast and easy – no scrubbing or cleaning.

No Tanks! – Never again worry about contamination or loss of tank pressure.

Sleek Styling – Distinctive design and compact construction appeals to customers.

Complete Product Literature and Training Support

SPECIFICATIONS AND PERFORMANCE

SYSTEM COMPARISON		
	PENTAIR WATER RO	STANDARD RO
Average Daily Production Rate	690 gallons	10-50 GPD
Water Storage Tank	Optional	Integral part of system
System Efficiency*	29%	As little as 5%

* Efficiency rating is identical to recovery rating when the system is tested without a storage tank or when a storage tank is bypassed.

MINIMUM & MAXIMUM OPERATING CONDITIONS		
CONDITION†	MINIMUM	MAXIMUM
Inlet Pressure	40 psi (2.76 bar)	80 psi (5.52 bar)
Inlet Temperature	40°F (4.44°C)	100°F (37.78°C)
Inlet TDS	50 mg/L	2,000 mg/L
Inlet Hardness	0 mg/L - (0 grain)	171 mg/L - (10 grain)
Inlet Chlorine	0 mg/L	1.0 mg/L
Inlet Iron	0 mg/L	0.1 mg/L
Inlet Manganese	0 mg/L	0.05 mg/L

† System is designed for use on potable water sources only.

TUBING/FITTING DIMENSIONS	
Inlet Tubing	4 feet of 1/2" natural tubing (1.22 meters of 12.7 mm natural tubing)
Concentrate Tubing	4 feet of 3/8" black tubing (1.22 meters of 9.53 mm black tubing)
Permeate Tubing	4 feet of 3/8" blue tubing (1.22 meters of 9.53 mm blue tubing)
Drain Tubing (for airgap installation)	3 feet of 1/2" red tubing (0.91 meters of 12.7 mm red tubing)
Drain Connection	3/8" or 1/2" (9.53 mm or 12.7 mm)
Carbon Post-Filter	3/8" quick disconnect fittings (9.53 mm quick disconnect fittings)

INLET CONNECTORS	
Option 1	1/2" x 1/2" x 1/2" tee (12.7 mm x 12.7 mm x 12.7 mm tee)
Option 2	5/8" x 5/8" x 1/2" tee (15.875 mm x 15.875 mm x 12.7 mm tee)
Option 3	1/2" x 1/2" threaded x 1/2" tee (12.7 mm x 12.7 mm threaded x 12.7 mm tee)
Option 4	0.59" x 0.59" x 1/2" tee (15 mm x 15 mm x 12.7 mm tee)

FILTER/MEMBRANE				
FILTER TYPE	DIMENSIONS		FLOW RATE‡	FILTER TYPE
	LENGTH	DIAMETER		
Carbon Pre-Filter	17.0" (43.2 cm)	2.9" (7.4 cm)	3.75 GPM (14.2 LPM)	6-12 months, 10,000 gal (37,850 liters)
RO Element	18.75" (47.6 cm)	3.16" (8.0 cm)	0.25 GPM (0.95 LPM)	2-4 years
Carbon Post-Filter	10.0" (25.4 cm)	2.0" (5.1 cm)	0.75 GPM (2.8 LPM)	6-12 months

‡ Based on internal testing data.


By pursuing new opportunities in light commercial applications, you'll open more customer doors with the Compact Design and High-Flow Output of Pentair Water Reverse Osmosis System.

Customers will love the convenience of purer, more refreshing water without the need to rearrange their spaces for pumps and tanks. Customers get a compact, reliable system that better suits the flow requirements of small and mid-sized businesses, at a cost that's a fraction of what they'd pay for most commercial RO systems.


The profitability doesn't stop on installation day. Replacement filters are available only from Pentair Water dealers like you, so each RO system is an open door to new customer opportunities for years to come.

APPLICATIONS



- | | |
|------------------------|------------------------------------|
| Steamers | Humidifiers |
| Coffee makers | Aquariums |
| Photography processing | Misters |
| Water coolers | Pubs |
| Business offices | Many more profitable possibilities |
| Restaurants | |

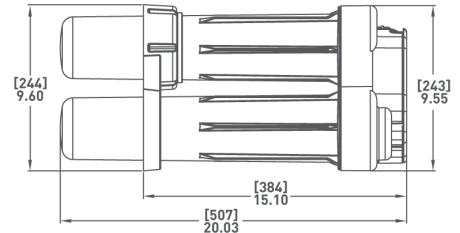

PERFORMANCE - FLOW RATE CHARACTERISTICS*

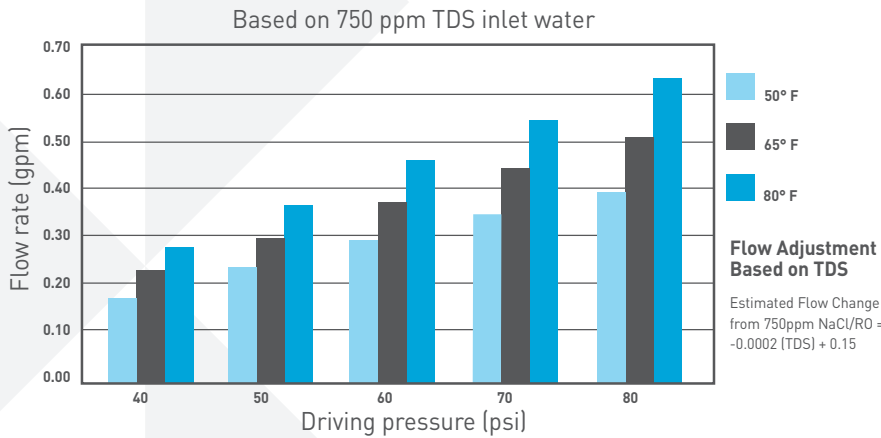

* Estimated flow based on internal test data. Actual performance may vary..

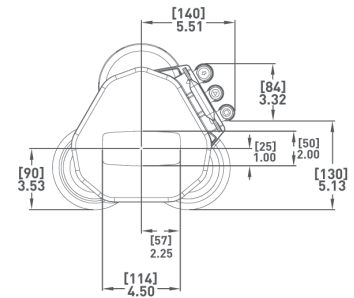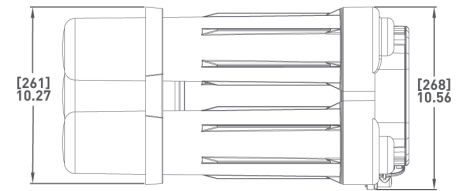

Outlines dimension in inches (cm)



FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | F: 262.238.4404 | WWW.PENTAIRAQUA.COM | CUSTOMER CARE: 800.279.9404

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

Pentair is an equal opportunity employer.

310134 REV B MR14 © 2014 Pentair Residential Filtration, LLC. All Rights Reserved.