

PERMEATE CONNECTOR

PiPerLink

patent pending



FEATURES

- A solution for every RO/UF vessel brand, connection and size
- **Versatility** in design and variety of connection options that allows cost savings in the design, manufacturing and installation
- Improved hydrodynamic internal shape which leads to **energy savings** due to a **lower pressure drop**
- 100% corrosion proof plastic material
- **Thermo-sealed** (glue free)
- **Certified** for drinking water and NSF-61 certification in process


BENEFITS

- **Single product with many connection options**
- **Allows for sample / probe valve**
- **Easy installation**
- **Time saver**
- **Leak proof**



Piedmont

DIFFERENT OPTIONS & CONFIGURATIONS

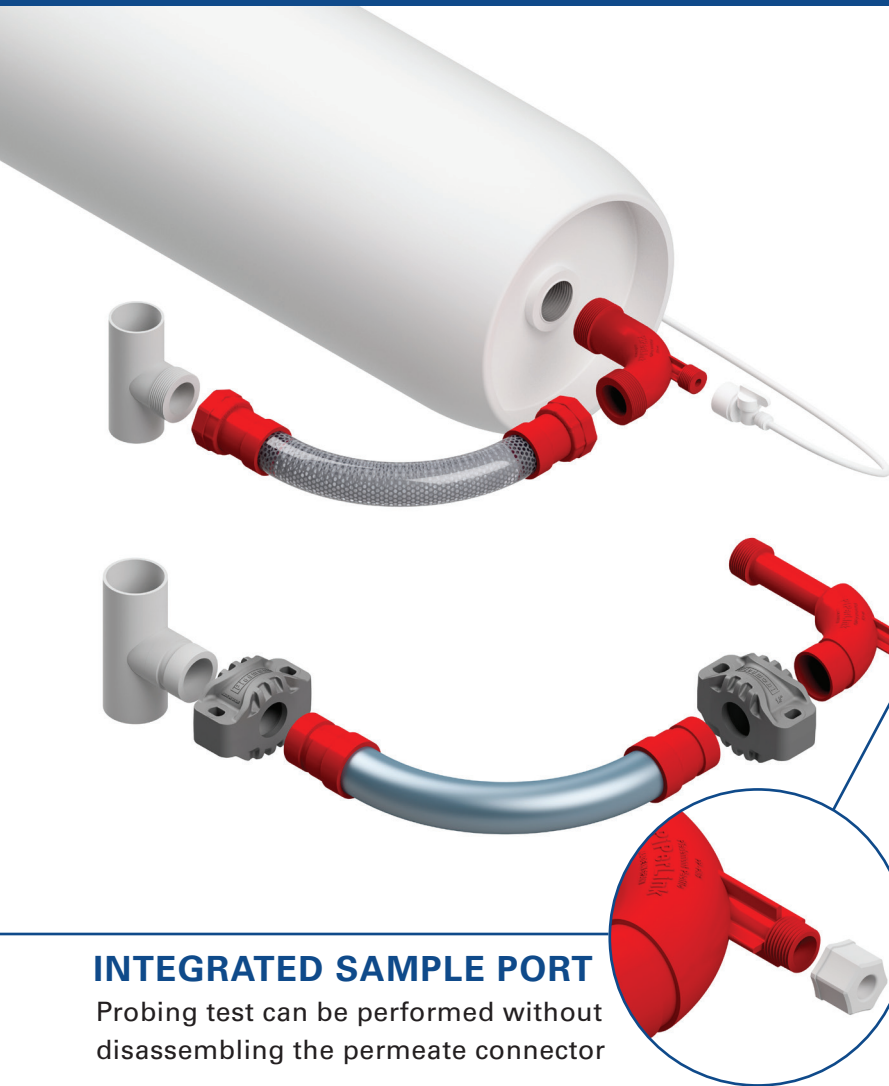

INTEGRATED SAMPLE PORT

Probing test can be performed without disassembling the permeate connector

CUSTOMIZED NOZZLE TYPES AND SIZES

DIMENSIONS

1" - 1.25" - 1.5"

NOZZLE TYPES

- LOOSE NUT
- NPT MALE
- COUPLING
- WELDED



CUSTOMIZED LENGTHS

HOSE

Cut to size

ELBOW

2 sizes, short and long models available, to accommodate any RO vessel design

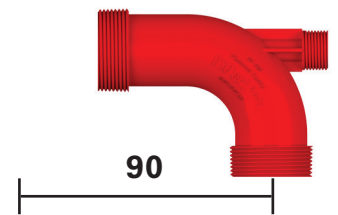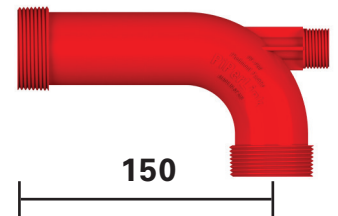

CLEAR OR OPAQUE HOSE

CUSTOMIZABLE COLORS

CODIFICATION

	Ø Diameter	RO Connector	Hose Connector	Length
Elbow PLE	1.00 in	M NPT	1.50 M NPT	90 mm
	1.25 in	GRV	1.25 GRV	150 mm
	1.50 in	LN NPT	W	
Example: PLE - 100LNPT - 150MNPT - 150				

M NPT: Male NPT Thread • LN NPT: Loose Nut NPT Thread
GRV: Grooved Coupling • W: Weld

	Ø Diameter	Elbow Connector	Manifold	Length
Hose PLH	1.00 in	1.50 LN NPT	M NPT	050 cm
	1.25 in	W	GRV	100 cm
	1.50 in	1.25 GRV	W	150 cm
			LN NPT	
	Example: PLH - 125GRV - 150LNPT - 050			

C/ Uribarte 18, 6º planta,
Bilbao, Bizkaia 48001
+34 9444.740.557
SPAIN

Piedmont
sales@piedmontpacific.com
www.piedmontpacific.com

340-330 rue St-Vallier Est,
Quebec City, QC G1K 9C5
+1 877.847.6763
CANADA