



The BMV10 manual multiport filter valve offers a flow rate of 4m³/h and is equipped with a corrosion-resistant gasket for reliable opening and closing. Designed for use as a service, backwash, and fast rinse valve, it operates efficiently under pressure. The convenient handle allows you to easily switch settings without needing to shut off the pump or power. Always depress the handle before turning to select a valve setting.

SPECIFICATIONS

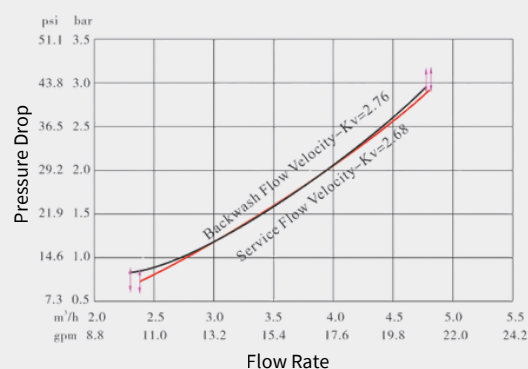

Dimensions		A	B	H
		126 mm	150 mm	173 mm
Service Conditions	Pressure	0.15 MPa - 0.6MPa		
	Water Temp	5°C - 50°C		
Service Environment	Environment Temp	5°C - 50°C		
	Relative Humidity	≤ 95% (25°C)		
Source Water Quality	Turbidity	< 20 FTU		
Max Flow Rate		4 m³/h		
Inlet/Outlet		1" Female BSP		
Drain		1" Female BSP		
Base		2.5" -8 NPSM		
Riser Pipe		1.05" OD		
Suitable for Tank Size		6" - 12"		

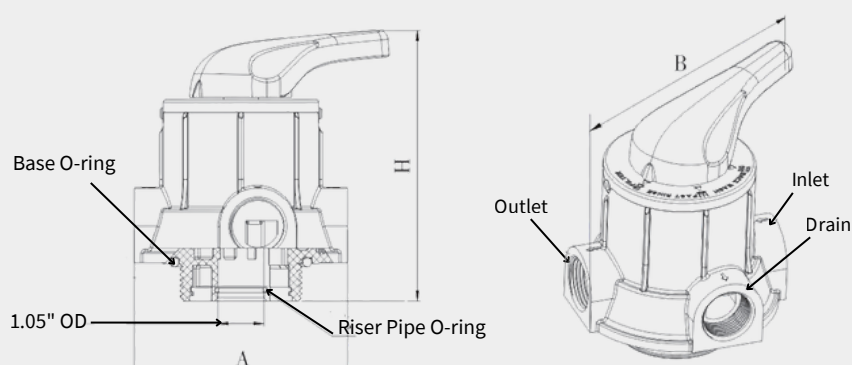