



The BMV20 manual multiport filter valve delivers a flow rate of 10 m³/h and features a corrosion-resistant gasket for reliable operation. It is versatile and can be used as a service, backwash, or fast rinse valve, even under pressure. The valve's rotating handwheel allows for easy setting adjustments without the need to shut off the pump. This filter is suitable for residential filtration systems and RO pretreatment filtration systems.

SPECIFICATIONS

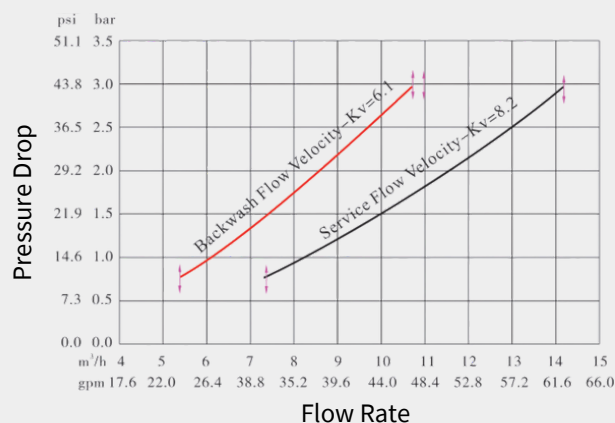

Dimensions		A	B	H
		180 mm	178 mm	220 mm
Service Conditions	Pressure	0.15 MPa - 0.6MPa		
	Water Temp	5°C - 50°C		
Service Environment	Environment Temp	5°C - 50°C		
	Relative Humidity	≤ 95% (25°C)		
Source Water Quality	Turbidity	< 20 FTU		
Max Flow Rate		10 m ³ /h		
Inlet/Outlet		2" Female BSP		
Drain		2" Female BSP		
Base		4" -8UN		
Riser Pipe		1.5"		
Suitable for Tank Size		10" - 24"		

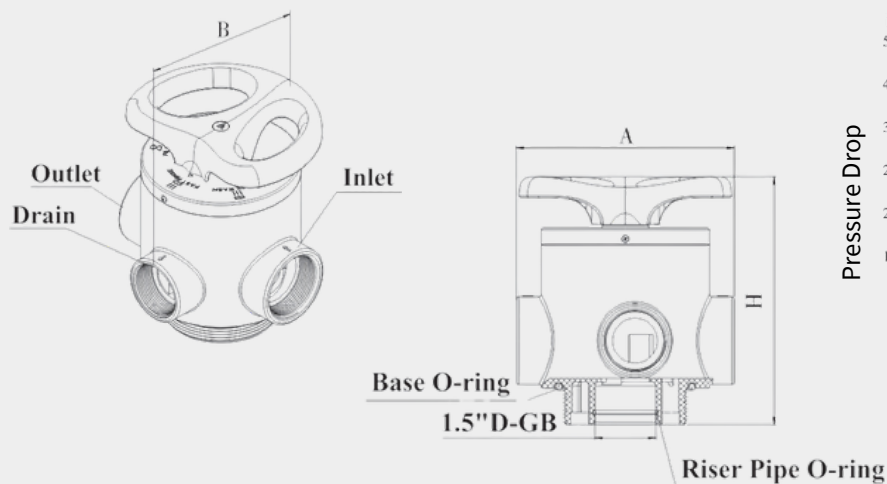